

# FIREX<sup>®</sup>

## Smoke Alarm

## Item 45184

### 120V AC Direct Wire with Battery Back-up Smoke Alarm with Moisture Resistant Coating

### Features

**Moisture Resistant** — A conformal coating has been applied to the insides of the alarm allowing it to be used in conditions where humidity and condensation can be an issue.

**Alarm Locator** — Red LED flashes until reset for quick, clear identification of the initiating alarm in an interconnected system.

**Quick Quiet™ False Alarm Control** — Quiets unwanted alarms for up to 15 minutes

**Visible Low Battery Indicator** — Helps locate chirping unit.

**9 Volt Battery Back-up (battery included)** — Provides added protection in the event of a power failure

**Ramp-Up Horn** — Allows you to test the unit without the ear-piercing horn.

### Architectural Specifications

The smoke alarm shall be a Styleline design (1-3/8" high, 4-7/8" wide), powered by a 120 VAC, 60 Hz source with a 9 volt battery back-up. The alarm shall have a "quick connect" molded harness. The alarm shall have a dual chamber ionization sensor. The alarm shall be rated at no greater than 0.5W in standby. Nominal sensitivity shall be measured by U.L. and U.L.C. at 1.29 ± 0.51% obs./ft. Temperature operating range shall be between 40° and 100°F; humidity range between 10%-93% relative humidity; 100% solid state alarm circuits over an input range of 100-130V AC. A green continuous power-on indicator shall be a built-in light emitting diode when AC power is present; a second red blinking LED shall indicate that a sufficient 9-volt battery back-up is present. When activated the initiating alarm red LED shall flash while the interconnected alarm LEDs remain extinguished. The Quick Quiet™ False Alarm Control feature shall desensitize the alarm for 15 minutes. The red LED shall blink once every 10 seconds when in Quick Quiet™ False Alarm Control and the alarm shall produce two short chirps 2 seconds apart at the conclusion of the desensitized period. The test switch shall electronically activate the chamber to simulate smoke and check for proper operation. The Piezoelectric horn shall have a level of 85 decibels at 10 feet. The alarm shall mount to a single gang box, 4" octagon junction box, or a square to round drywall ring without screw removal. It shall have a pigtail wiring, and a separate mounting bracket. It shall include a battery "lock-out" to prohibit mounting if battery is not installed and a tamper-resistant locking pin to prevent unauthorized removal. The 45184 shall meet the requirements of U.L. Standard 217.


### Description

The FireX<sup>®</sup> 45184 Smoke Alarm is an ionization 120V AC smoke alarm with battery back-up for single or multiple station use. It has a conformal coating which allows it to be used in conditions where humidity and condensation can be an issue. The 45184 includes a Quick Quiet™ False Alarm Control feature which allows the user to quiet an unwanted alarm for up to 15 minutes. The 45184 has an 85 decibel horn, ramp-up test horn, test switch and separate lighted power and alarm LED indicators. The Latching LED feature clearly identifies the smoke alarm that initiated an alarm in an interconnected system with a flashing red LED. The dust cover eliminates nuisance call-backs by keeping construction dust and debris from causing false alarms.



### Installation of Smoke Alarm

This smoke alarm should be installed in accordance with the NFPA's Standard 72 (National Fire Protection Association, Batterymarch Park, Quincy, MA 02269) and any local codes that apply. Use #18 AWG minimum solid or stranded wire. When interconnecting, maximum wire length between any two is 1,500 feet for #18 AWG or 4,000 feet for #14 AWG (20 OHMS loop resistance). DO NOT connect to any other type or model of heat or smoke alarm. Connect smoke or heat alarms to a single AC branch circuit. If local codes do not permit, be sure the neutral wire is common to both phases.

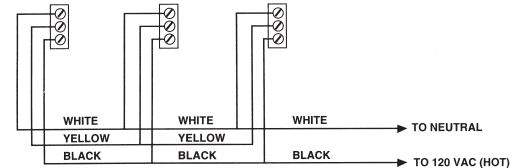

### Technical Information

<b>Item/Model</b>	45184 / ADC
<b>Product Weight</b>	8 ounces
<b>Operating Temp.</b>	40° to 100°F
<b>Interconnect Qty.</b>	Up to 18 FireX devices maximum: 12 smoke alarm or smoke and carbon monoxide combination alarms, items 4418 (model AD), 4518 (model ADC), 4671 (model TCPI), 5000 and 4618 (model FADC), 4480 (model PAD), and FireX smoke and carbon monoxide combination alarm 12000 (model FADCM). Up to 6 heat or carbon monoxide alarms maximum; FireX heat alarm item 5700 (model ADH), FireX carbon monoxide alarm items 6045 (model COQ8) or 10000 (model COE).
<b>Electrical Rating</b>	120V AC, 60Hz, 50mA max, 9 Volt Battery Back-up
<b>Alarm Point</b>	1.29 +/- 0.51% / ft. obscuration
<b>Horn Output</b>	85 decibels at 10 feet
<b>Listing</b>	UL 217
<b>Detection Type</b>	Dual ionization chamber
<b>Humidity Range</b>	10% to 93% Relative Humidity

### Shipping Specifications

<b>Individual Carton Dim.</b>	5-1/8" x 5-1/8" x 1-9/16"	13cm x 13cm x 4.0cm
<b>Master Carton Quantity</b>	24	
<b>Master Carton Dimensions</b>	19-3/4" x 10-3/4" x 5-1/2"	50.2cm x 27.3cm x 13.9cm
<b>Master Carton Weight</b>	13 lbs	5.9 kg
<b>Pallet Quantity</b>	1152	
<b>Pallet Dimensions</b>	40"L x 48"W x 48"H	102cm x 122cm x 122cm

invensys.  
**Controls**  
 191 E. North Avenue  
 Carol Stream, Illinois 60188 USA  
 Telephone +1 800 951 5526 Facsimile +1 630 260 7299  
 iccacomerservice@invensys.com

Technical Service Telephone +1 800 445 8299  
 Technical Service Facsimile +1 630 260 7243  
 technicalservice@invensys.com  
 www.invensyscontrols.com  
 ©2006 Invensys Controls 11/06 - #150-1888B



**5 Year Limited Warranty**